

Ferramenta Hardware  
 Componenti Components

Spina in legno 8x30 (P) Wooden pin 8x30 (P)



n°8

Piedini regolabili diam.=35 (Q) Adjustable feet diam.=35 (Q)



n°4

Grano 8x12 (R) Threaded screw 8x12 (R)



n°4

Barilotto 14x17.5 (S) Barrel 14x17.5 (S)



n°4

Barilotto 14x14 (T) Barrel 14x14 (T)



n°5

Tirante 7x33.5 (U) Tie-rod 7x33.5 (U)




n°9


Grano 8x8 (V) Threaded screw 8x8 (V)




n°5




Piano (A)  
 Top (A)




Fianco DX (B)  
 R side (B)



Fianco SX (C)  
 L side (C)






Traversa (D)  
 Cross panel (D)

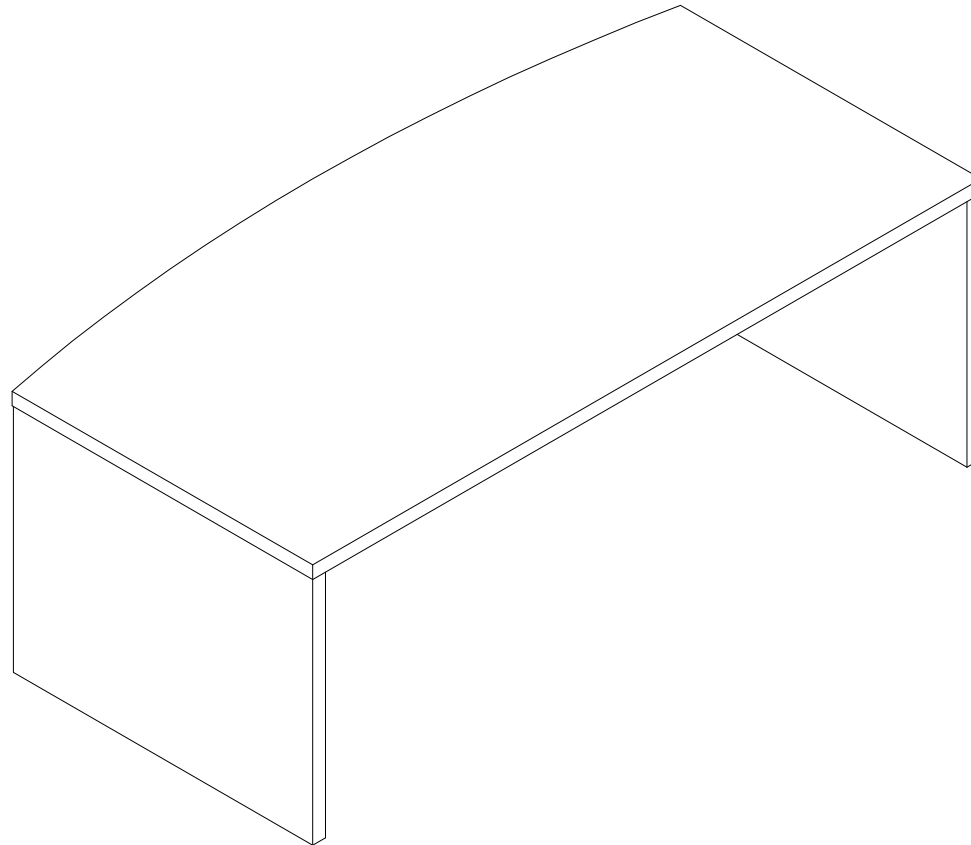

**Fig.1 Posizionare spine (P), barilotti(S),tiranti(U) nei fianchi(B e C)**  
 Fig.1 Position the pins (P), barrels (S) and tie-rods (U) in the sides (B and C)

**1) Posizionare le spine (P), i barilotti (S), i tiranti (U) e piedini (Q) nei fianchi (B e C).**  
 1) Position the pins (P), barrels (S), tie-rods (U) and feet (Q) in the sides (B and C)

**2) Posizionare i barilotti (T) nella traversa (D).**  
 2) Position the barrels (T) in the cross panel (D)

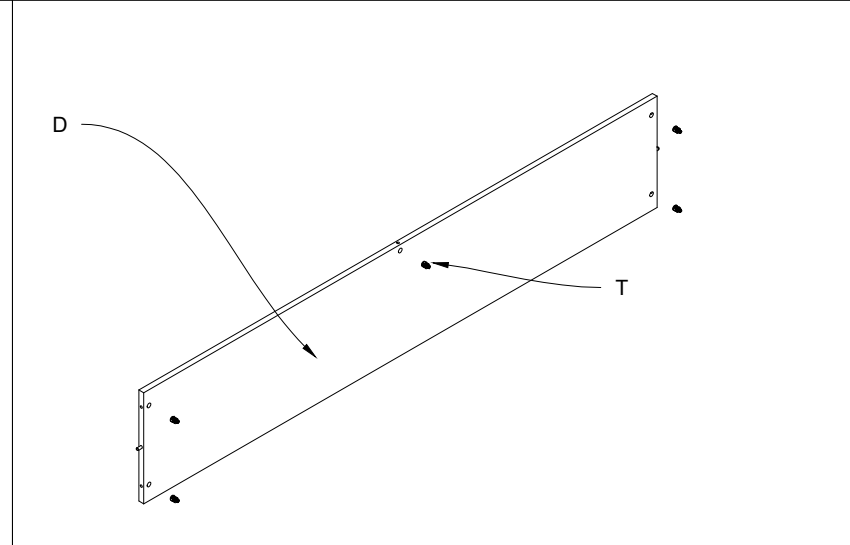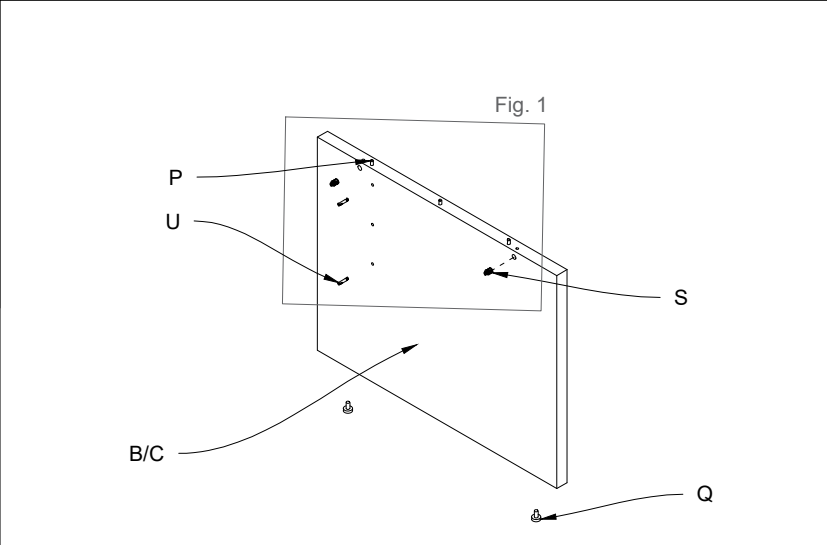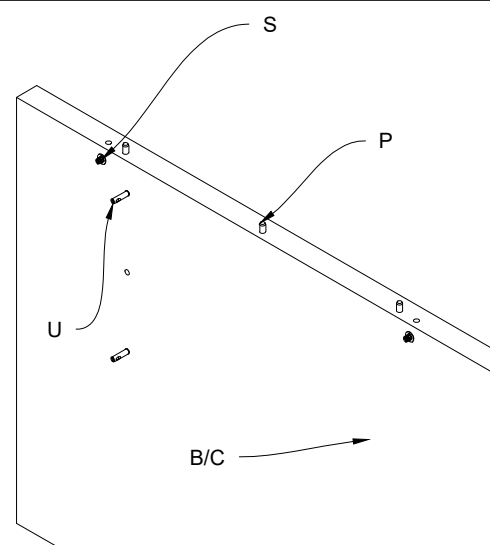

**Fig.2 Posizionare tiranti(U) nel piano (A)**  
 Fig.2 Position the tie-rods (U) in the top (A)

**3) Posizionare i tiranti (U) nel piano (A).**  
 3) Position the tie-rods (U) in the top (A)

**4) Unire i fianchi (B e C) alla traversa (D) tramite le spine (P) e i tiranti (U)**  
 4) Unite the sides (B and C) to the cross panel (D) by means of the pins (P) and tie-rods (U)




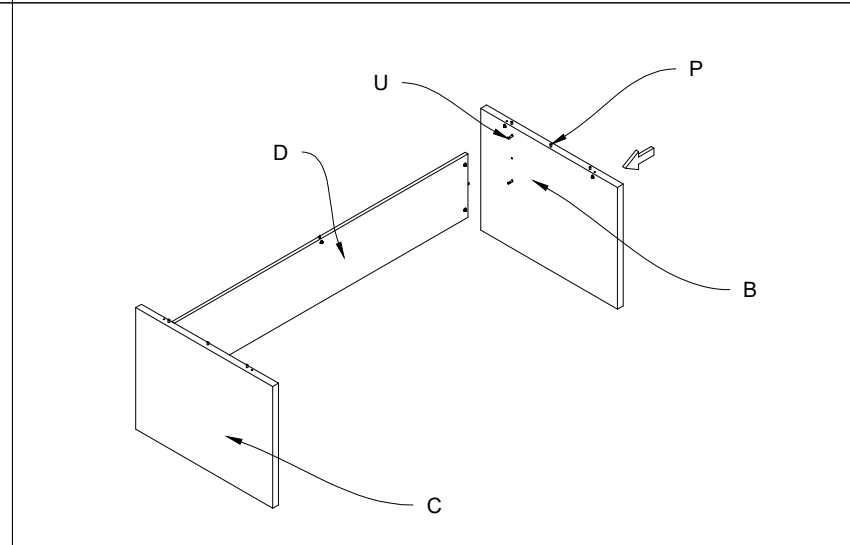


Fig.1 Serraggio grani (V) nei barilotti (T)

Fig.1 Tighten the treaded screws (V) in the barrels (T)

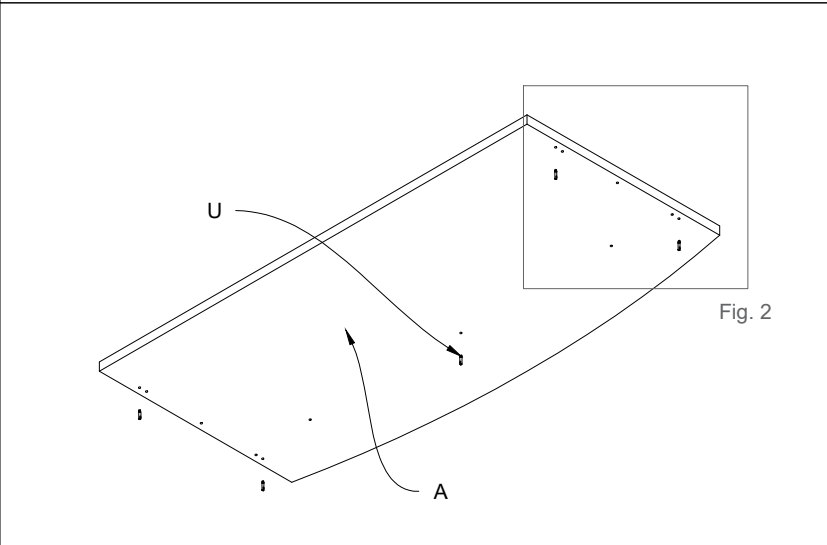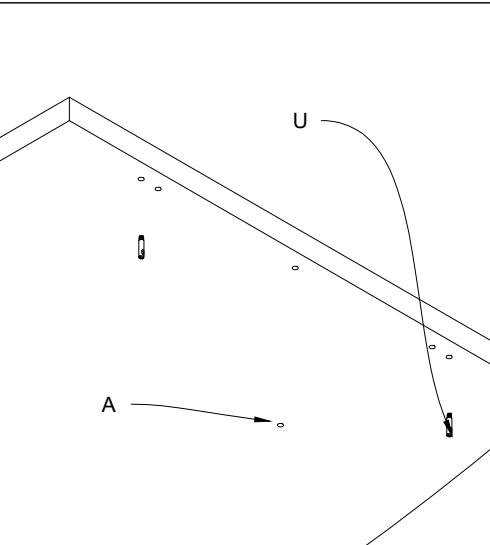

5) Posizionare il piano (A), sopra la struttura e agganciarlo tramite le spine e i tiranti (U)

5) Position the top (A) on top of structure and fasten it by means of the pins and tie-rods (U)

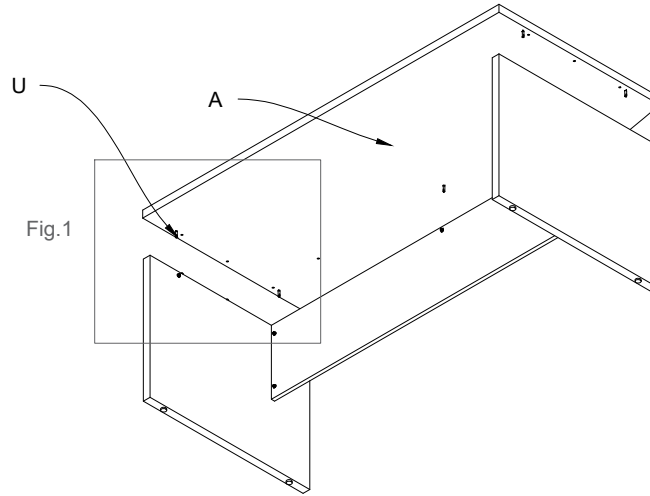


Fig.1 Serraggio grani (R) nei barilotti (S)

Fig.1 Tighten the treaded screws (R) in the barrels (S)

