












Ferramenta Hardware	Componenti Components									
Chiave esagonale Hexagonal key	n°1			Cuscino (A) Cushion (A)		Base e cappello (B) Base and top (B)		Elementi 1 (C) Elements 1 (C)		Fianchi (D) Sides (D)
Spina in legno 8x30 (T) Wooden pin 8x30 (T)	n° 26			Elemento 2 (E) Element 2 (E)						
Barilotto 14x14 (U) Barrel 14x14 (U)	n°12									
Tirante 7x33.5 (V) Tie-rod 7x33.5 (V)	n°12									
Grano 8x8 (Z) Threaded screw 8x8 (Z)	n°12									
Feltri Felt pads	n°4									

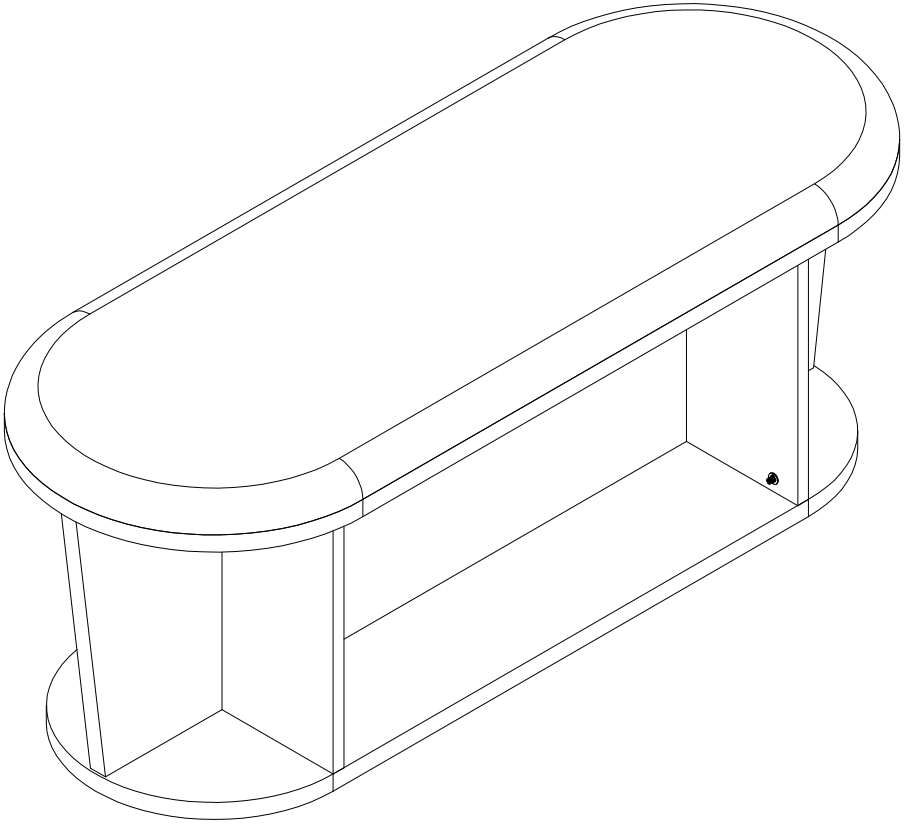


Fig.1 Serrare i grani (Z) nei barilotti (U).
 Fig.1 Tighten the threaded screws (Z) in the barrels (U).



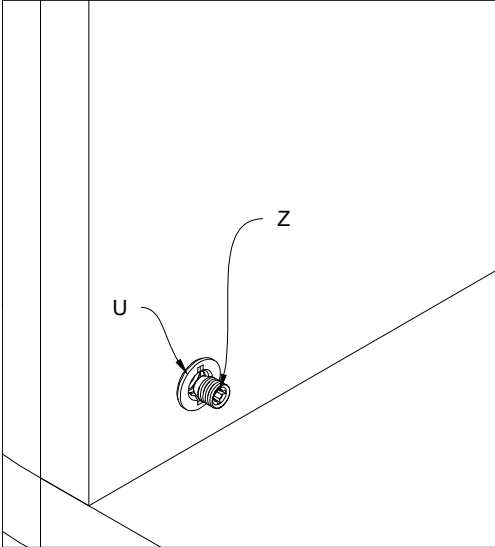


Fig.1 Serrare i grani (Z) nei barilotti (U).
 Fig.1 Tighten the threaded screws (Z) in the barrels (U).

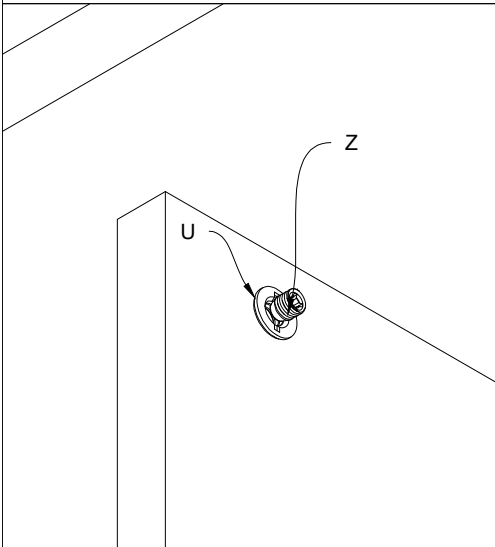


1) Posizionare la base (B) sul pavimento e inserire i fianchi (D) tramite spine (T) tiranti (V) e barilotti (U).

1) Position the base (B) on the floor and insert the sides (D) by means of the wooden pins (T), tie-rods (V) and barrels (U).

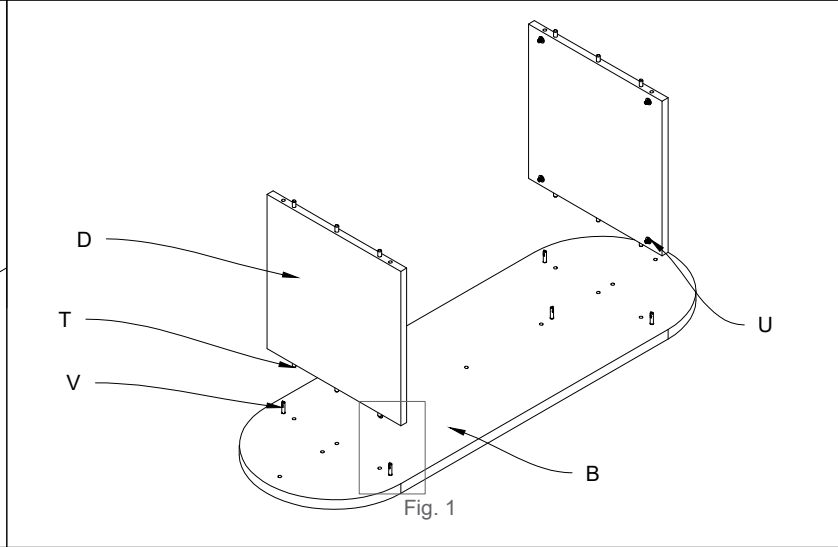


2) Inserire l'elemento 2 (E) tra i fianchi esterni (D) e la base (B) ed unirlo con le spine (T) e i tiranti (V).

2) Insert the element 2 (E) between the external sides (D) and base (B), unite it by means of the wooden pins (T) and tie-rods (V).

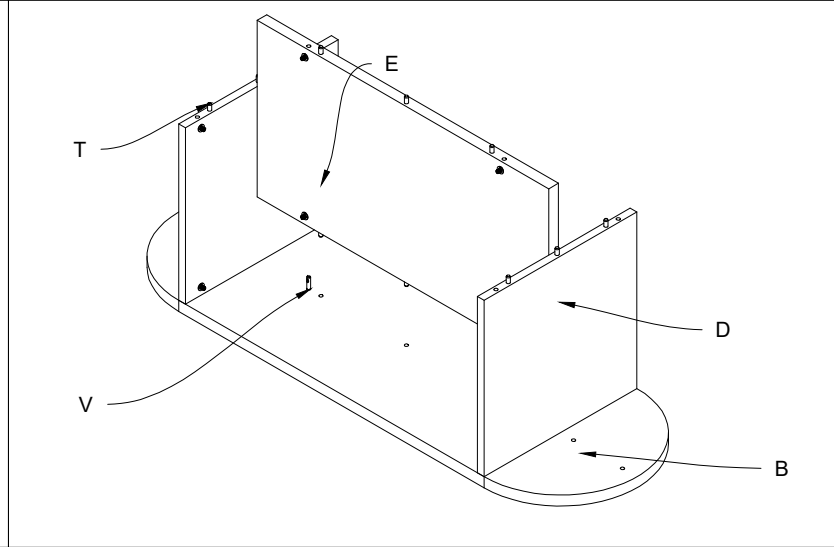


3) Unire gli elementi 1 (C) alla base (B) con le spine (T)

3) Unite the elements 1 (C) to the base (B) by means of the wooden pins (T).

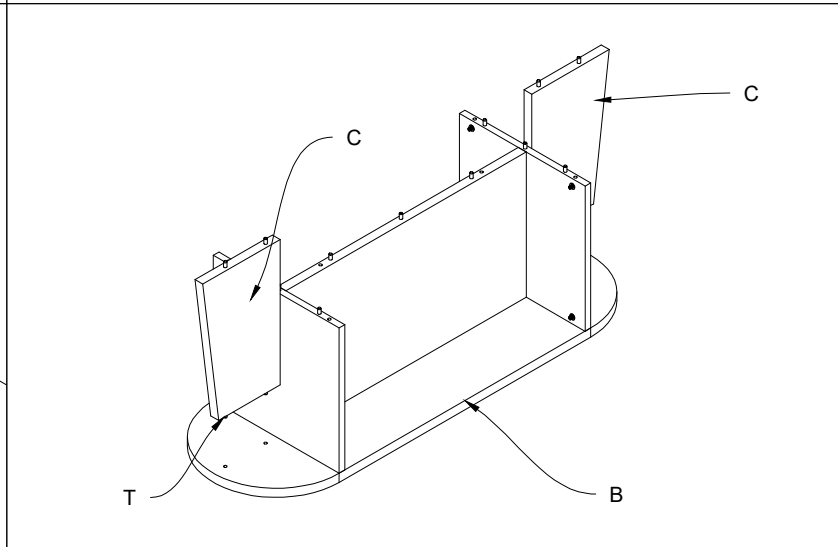

4) Posizionare il cappello (B) in corrispondenza dei tiranti (V) e delle spine (T).

4) Position the top (B) in function of the tie-rods (V) and wooden pins (T).

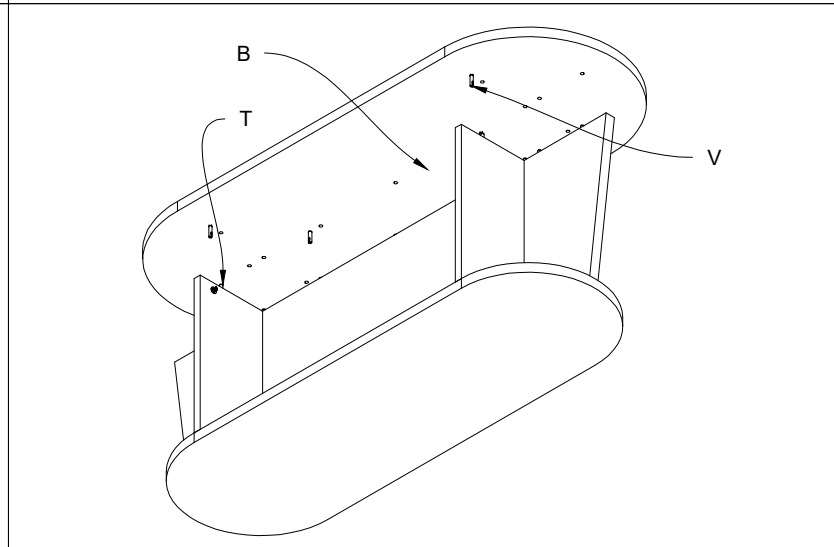

5) Posizionare il cuscino (A) sopra il cappello (B).

5) Position the cushion (A) on top of the top (B).

